


FEATURES

- WITH DIGITAL INTEGRATION FEATURES!
 - OUTPUTS WITH PULSE, PULSE-TRAIN, PWM, FREQUENCY, AND QUADRATURE GENERATION
 - INPUTS WITH DIGITAL FILTERING AND FLEXIBLE MEASUREMENT OF PULSE DURATION
 - FREQUENCY AND EVENT COUNTING, IRQ GENERATION AND MORE
- PCI EXPRESS MINI CARD (mPCIe) TYPE F1, WITH LATCHING I/O CONNECTOR
- 24 HIGH-CURRENT DIO LINES (24mA SOURCE/SINK)
- CHANGE-OF-STATE (CoS) DETECTION IRQ GENERATION
- 10K OHM PULL-UP RESISTORS
- FOUR AND EIGHT BIT PORTS INDEPENDENTLY SELECTABLE FOR USE AS INPUTS OR OUTPUTS
- ALL SIGNALS BROUGHT OUT TO OPTIONAL PANEL-MOUNTABLE 37-PIN MALE DSub CONNECTOR
- ROHS STANDARD
- AVAILABLE INDUSTRIAL TEMP (-40°C TO +85°C)
- ALSO AVAILABLE IN M.2 FORM!

MODEL mPCIe-DIO-24A

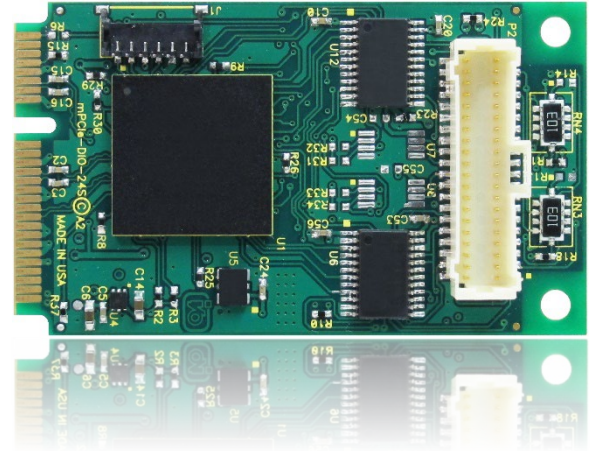

FUNCTIONAL DESCRIPTION

The mPCIe-DIO-24A is a type F1 PCI Express Mini card and optional cable assembly (DSub 37-pin Male connector) designed to be easily panel-mounted in any application environment. The digital I/O is compatible with 8255 PPI chips making it easy to program. It provides three 8-bit I/O ports designated A, B and C. Port C can be further divided into two 4-bit nybbles. Each port can be programmed as inputs or outputs.

Advanced Change of State (COS) detection and interrupt capabilities are designed to relieve software from polling routines that consume valuable processing time. Each input bit can be programmed for detecting various changes on their lines, can count the enabled types of input change, and can be enabled to generate an IRQ when the desired number of these events have been detected. In addition to the classic COS IRQ, in which each individual change of the enabled ports' bits (both low-to-high and high-to-low on any bit of the enabled COS-group) will generate an IRQ, Advanced Digital/Features lets you enable only rising- or falling-edges to generate events, or even high-or-low-side pulses within some range of duration, and the IRQ will only be generated when enough events have accumulated — all of this configurable on a per-bit basis.

DIGITAL/FEATURES

Digital/Features (read as "Digital Integration Features") are front and center on this card, such as memory mapped registers for low-latency operation. Output channels support pulse, pulse-train, PWM, frequency, and quadrature generation. Inputs channels support flexible measurement of pulse duration, frequency, and event counting, with optional debouncing, IRQ generation, and more.

SPECIAL ORDER

Please contact ACCES with your precise requirement. Examples of special orders would be pull-down resistors, conformal coating, a CMOS version with user supplied 5VDC VCCIO, custom software or product labelling, and more.


ACCESSORIES


Available accessories include:

- | | |
|----------------------|--------------------------------------|
| CAB-mPCIe-DB37M | 40-pin to DB37-pin Male cable |
| ADAP37F-MINI | 37-pin Screw Terminal Adaptor |
| mPCIe-HDW-KIT2 / 2.5 | 2mm and 2.5mm mounting hardware kits |

SOFTWARE

The card is supported for use in most operating systems and includes a free Linux and Windows compatible software package. This package contains sample programs and source code in Visual Basic, Delphi, and Visual C++ for Windows. Also provided is a graphical setup program in Windows. Linux support includes installation files and basic samples for programming from user level via an open source kernel driver. Third party support includes a Windows standard DLL interface usable from the most popular application programs. Embedded OS support includes the family of Windows Operating Systems including IoT. ACCES is also now offering a VxWorks driver/library for the ultimate real-time process monitoring and control solution.

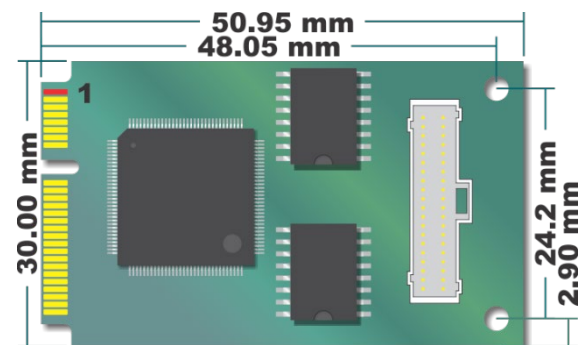

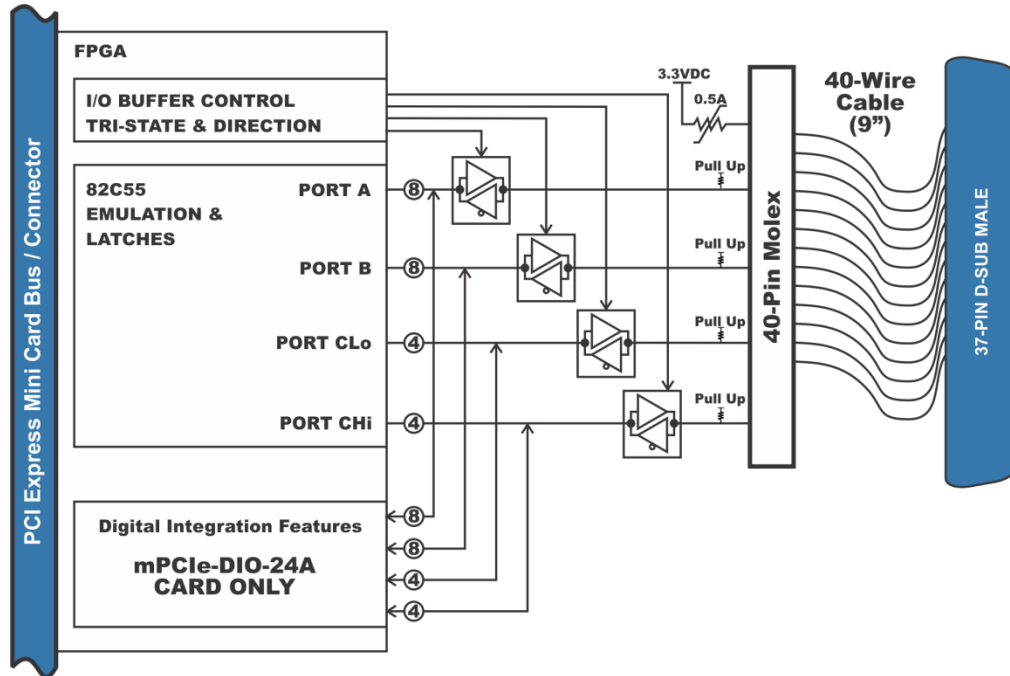

PC Interface

| | |
|------------|-------------------|
| mPCIe Card | Full size type F1 |
|------------|-------------------|

Digital Input / Output Interface

| | | |
|------------------------------------|---|---|
| Digital Bits | 24 | |
| Compatibility | 8255 Mode 0 | |
| Performance | 1 μ s per 32-bit transaction max ~3.5 μ s in Windows | |
| Digital Inputs | Logic High | 2.0V to VCCIO (3.3VDC, 5VDC tolerant) |
| | Logic Low | 0V to 0.8V |
| Digital Outputs (Standard Version) | Logic High | 2.0V (min) 24mA source |
| | Logic Low | 0.55V (max) 24mA sink |
| | Power Output | +3.3 VDC via 0.5A polyfuse (resetting) |
| CMOS w/user VCCIO | 1.65V to 5.5V | At DB37M, via polyfuse |
| Digital Outputs (-TTL Option) | Logic High | 3.8V (min) 32mA UVCCIO = 4.5V |
| | Logic Low | 0.55V (max) 32mA UVCCIO = 4.5V |
| Debounce Feature | Bits 0-7 and 16-23 only | Enabled per-bit Global filter configuration between ms and μ s scale filtering |
| Pulse Measurement | Bits 0-7 and 16-23 only | Measured using an 8ns, 16-bit clock. Narrowest pulse 8ns, longest 524.28ms |
| Frequency Measurement | Bits 0-7 and 16-23 only | Measured using an 8ns, 32-bit clock. Fastest frequency 62.5MHz |
| Quadrature Counter | Bits 20 and 21 Opt. Index bit 22 | 32-bit 2's complement counter at up to 62.5MHz, X1 mode only |

| | | |
|------------------------|-------------------------|---|
| Motor Control | Bits 16 and 17 | Quadrature output forwards or backwards up to 2 ³¹ steps at speeds between 62.5MHz and 119.2Hz |
| Event Counter | Bits 0-7 and 16-23 only | Count up to 255 enabled events with 8-bit counter threshold IRQ per bit. |
| Pulse Generation | Bits 8-15 only | Generate a high or low pulse using 8ns resolution, 16ns to 524.280ms duration |
| Pulse Train Generation | Bits 8-15 only | Generate between 2 and 255 pulses with 8ns to 524.280ms between them |
| PWM Generation | Bits 8-15 only | Specify high and low side pulse durations with 8ns resolution. |

Environmental

| | | |
|----------------|---------------------------|--|
| Temperature | Operating | 0° to 70°C (order "-T" for -40° to 85°C) |
| | Storage | -65° to 150°C |
| Humidity | 5% to 95%, non-condensing | |
| Power required | +3.3VDC @ 330mA (typical) | |

Physical

| | | |
|---------------|-----------------------------------|--|
| Weight | 5.8 grams (+ 22.2g for the cable) | |
| Size | Length | 60mm/80mm |
| | Width | 22mm |
| I/O connector | On-card mating | Molex 501190-4017 40-pin latching |
| | On cable mating | Male, D-Sub Miniature, 37-pin Female, D-Sub Miniature, 37-pin |

ORDERING GUIDE

| | |
|----------------------|--|
| mPCIe-DIO-24A | 24 Digital I/O w/Digital Integration Features mPCIe Card |
| | Add -T to your model # for Industrial Temperature Option (-40° to 85°C) |
| | Add -TTL for flexible signal levels w/user supplied VCCIO (+1.65 to +5V) |